



FEATURED PRODUCTS



3520C LATHE
2 HP 230V
PG 135



PM2815BT
15" BENCHTOP
DRILL PRESS
PG 137



209HH 20" PLANER
PG 144



ENHANCED VISIBILITY

The dark surface reduces glare, so you can see where you're cutting better.



LOW FRICTION

ArmorGlide tables require 50% less force, so you get more control.



MAINTENANCE FREE

Get rid of the waxes and messy cleaning supplies; do more of what you love.



DURABLE COATING

ArmorGlide tables can withstand 250,000 passes without showing signs of wear.



RUST RESISTANT

Ditch the steel wool and never worry about rust again.

ARMORGLIDE TECHNOLOGY

15" BANDSAW

- Blade tension release with electrical interlock prevents the bandsaw from starting when the blade is detensioned or released
- Solid cast-iron upper and lower wheels create the momentum needed for heavy resaw
- Oversized fence side plate can be used in the horizontal or vertical position
- Sturdy cast-iron table and trunnion assembly offers maximum rigidity for heavy workpieces

ARMORGLIDE TECHNOLOGY	
STOCK NO.	MODEL
PM1-1791500T	PM1500T, 15" Bandsaw, 3HP 1PH 230V, ArmorGlide

STOCK NO.	MODEL
1791500	PM1500, 15" Bandsaw, 3HP 1PH 230V



PM1-1791500T

PWBS-14CS 14" BANDSAW

- Precision-balanced, nine-spoke cast-iron wheels reduces vibration and creates smoother blade travel
- Upper and lower dual ball bearing guides for accurate cuts
- CARTER® quick tension lever speeds blade changes and the detensions setting extends blade life during non-use
- Chip blower ensures a clean, visible cut line
- Exclusively designed, quick-release precision T-square style rip fence with 4" resaw attachment

STOCK NO.	MODEL
1791216K	PWBS-14CS, 14" Bandsaw, 1.5HP 1PH 115/230V



1791216K

18", 20", & 24" BANDSAWS

- Spacious, heavy-duty cast-iron table with more room in front of the blade
- Solid cast-iron upper and lower wheels create the momentum needed for heavy resaw
- Foot brake with magnetic switch interrupt provides user with hands-free stopping option
- Exclusive Powermatic® T-square style Accu-Fence® maximizes accuracy and safety
- Blade tension release with electrical interlock prevents the bandsaw from starting when the blade is detensioned
- Heavy-duty 5HP motor provides power needed for all projects

ARMORGLIDE TECHNOLOGY	
STOCK NO.	MODEL
PM1-1791800BT	PM1800BT, 18" Bandsaw, 5HP 1PH 230V, ArmorGlide
PM1-1791801BT	PM1800B-3T, 18" Bandsaw, 5HP 3PH 230V, ArmorGlide
PM1-1791257BT	PM2013BT, 20" Bandsaw, 5HP 1PH 230V, ArmorGlide
PM1-1791258BT	PM2013B-3T, 20" Bandsaw, 5H, 3PH 230V, ArmorGlide
PM1-1791259BT	PM2415BT, 24" Bandsaw, 5HP 1PH 230V, ArmorGlide
PM1-1791260BT	PM2415B-3T, 24" Bandsaw, 5HP 3PH 230V, ArmorGlide

STOCK NO.	MODEL
1791800B	PM1800B, 18" Bandsaw, 5HP 1PH 230V
1791801B	PM1800B-3, 18" Bandsaw, 5HP 3PH 230/460V
1791257B	PM2013B, 20" Bandsaw, 5HP 1PH 230V
1791258B	PM2013B-3, 20" Bandsaw, 5HP 3PH 230/460V
1791259B	PM2415B, 24" Bandsaw, 5HP 1PH 230V
1791260B	PM2415B-3, 24" Bandsaw, 5HP 3PH 230/460V



PM1-1791801BT

CONTACT CUSTOMER SERVICE WITH QUESTIONS ABOUT 460V PRODUCTS

PM2014 LATHE

- Motor only requires a 115 volt single-phase input while providing a consistent torque with 1 horse power, 230 volt, and 3 phase output using an inverter
- Adjust centerline to floor from 34 inches to 46 inches for maximum control and comfort
- Magnetic control box displays both digital speed and indexing and can be relocated for convenience and safety
- Twenty-four positive locking indexing positions, displayed on the repositionable magnetic control box, simplifies the indexing process
- Sliding headstock and removable tailstock make outboard turning easy
- Cast-iron bed reduces motor vibration for decreased noise and added precision

STOCK NO.	DESCRIPTION
-----------	-------------

1792014AK	PM2014 Lathe and Stand Kit
1792014	PM2014 Lathe

ACCESSORIES

STOCK NO.	DESCRIPTION
1792014S	PM2014 Lathe Stand
6294755	PM2014 Lathe Bed Extension and Post
6294700	PM2014 Lathe Tool Extension

6294924	PM2014 Light
---------	--------------




1792014AK

ACCESSORIES



1792014S
PM2014 PM LATHE STAND



6294755
PM2014 PM LATHE
BED EXTENSION
AND POST RISER



6294700
PM2014 PM LATHE
TOOL EXTENSION



6294924
PM2014 LED LIGHT
WITH BRACKET

3520C LATHE

- Digital indexing readout simplifies the indexing process for added precision
- Magnetic-backed moveable control box for customizable versatility and safety
- Adjustable riser blocks for 4 inches of height adjustment, allowing maximum comfort when turning
- Upgraded banjo features a non-marring, pinch style clamp for solid toolrest placement
- Extended spindle nose increases access to the workpiece
- Able to maintain speed as low as 15 RPM

STOCK NO.	DESCRIPTION
-----------	-------------

1353001	3520C Lathe, 2HP, 220V
---------	------------------------

ACCESSORIES

STOCK NO.	DESCRIPTION
-----------	-------------

6294721	Tailstock Swing Away for 3520, 3520A, 3520B, 3520C, PM2020
1353002	Powermatic® 3520C Bed Extension 20in
6294925	PM3520C Light
6294739	6" Toolrest
6294751	Bowl Turning Toolrest - Left
6294740	Bowl Turning Toolrest - Right
6294732	Outboard Turning Stand



1353001

ACCESSORIES



1353002
BED EXTENSION FOR 3520C



6294925
3520C LED LIGHT WITH BRACKET



6294751
BOWL TURNING REST (LEFT)



6294740
BOWL TURNING REST (RIGHT)



6294732
HEAVY-DUTY OUTBOARD TURNING STAND

PM2020 SHORT BED LATHE

- Sliding headstock with electronic variable speed
- Digital RPM readout for accurate speed adjustments
- Tailstock has internal storage for additional accessories and attached tool caddy allows convenient access to centers and wrenches
- Spindle lock and built-in spindle indexing on the headstock for drilling hole patterns, routing flutes and other equally spaced features
- Two-position mount for the optional bed extension
- Chrome-trimmed handwheels are ergonomic for a comfortable feel
- Guard included

STOCK NO.	DESCRIPTION
1792020	PM2020 Short Bed Lathe, 2HP 1/3PH 220V

ACCESSORIES

STOCK NO.	DESCRIPTION
6294727B	PM2020 Bed Ext.
6294721	Tailstock Swing Away for 3520, 3520A, 3520B, 3520C, PM2020



1792020

4224B LATHE

- Sliding headstock with electronic variable speed and digital RPM readout for accurate speed adjustments
- Spindle lock and built-in spindle indexing on the headstock for drilling hole patterns, routing flutes, and other equally spaced features
- Vacuum system provides quick method of chucking bowl blanks
- 15-amp quad receptacle for easy reach or powered accessories
- Set of dead centers which hold a spindle for visual comparison
- Quad system provides 115-volt electrical supply
- Magnetic-backed moveable control box for customizable versatility and safety
- Light and guard included

STOCK NO.	DESCRIPTION
1794224K	4224B Lathe, 3HP 1/3PH 220V

ACCESSORIES

STOCK NO.	DESCRIPTION
6294706	4224B Lathe Tailstock Swing Away
6294905	20" Bed Extension for 4224B
6294903	Tailstock Riser Block for 4224B



1794224K

LATHE ACCESSORIES

ACCESSORIES

STOCK NO.	DESCRIPTION
6294739	6" Toolrest for 3520A, 3520B, 4224
6294751	Bowl Turning Toolrest (Left) for 3520A, 3520B, 4224
6294740	Bowl Turning Toolrest (Right) for 3520A, 3520B, 4224
6294732	Heavy-Duty Outboard Turning Stand for Models 3520C and 4224B



6294739
6" TOOLREST FOR 3520A, 3520B, 4224



6294751
BOWL TURNING TOOLREST



6294732
HEAVY-DUTY OUTBOARD TURNING STAND

PM2815FS 15" FLOORSTANDING DRILL PRESS

SPECIFICATIONS	
STOCK NO.	PM 1- 33
Motor	3/4 HP/115V DC brush motor
Drive	Gear Driven
Swing	15"
Quill Travel	<ul style="list-style-type: none"> • Available 5" • Scale display 4" (Spindle travel per one revolution of handle) • Depth setting 3.7"
Quill Diameter	52mm
Maximum Spindle To Table Distance	14.43" / 366.5mm
Maximum Spindle To Base Distance	22.67" / 576mm
Maximum Chuck To Table Distance	10.216" / 259.5mm
Maximum Chuck To Base Distance	18.464" / 469mm
Speed Range	250-3000
Table Insert	3.7" x 3.9" (94 x 99mm)
Table Dims	11.61" x 12.59" (295mm x 320mm)
Chuck Style	Keyed/ MT2-JT3
Shank Capacity	5/8" (16mm)
Led Light	Yes
Laser (Cross Hair)	Yes
Readout	Digital
Speed Selection	Dial
Column Diameter	Φ 73mm
Base Size	18.25" x 11.74" x 2.28" (463.7mm x 298.2mm x 58mm)
Overall Dimensions Assembled, LxWxH (Approx.)	24.46" x 20.51" x 46.84" (H) (621.37mm x 521mm x 1204mm (H))



PM1-33



PM2815BT 15" BENCHTOP DRILL PRESS

SPECIFICATIONS	
STOCK NO.	PM 1- 34
Motor	3/4 HP/115V DC brush motor
Drive	Gear Driven
Swing	15"
Quill Travel	<ul style="list-style-type: none"> • Available 5" • Scale display 4" (Spindle travel per one revolution of handle) • Depth setting 3.7"
Quill Diameter	52mm
Maximum Spindle To Table Distance	23.425" (595mm)
Maximum Spindle To Base Distance	45.433" (1154mm)
Maximum Chuck To Table Distance	19.213" (488mm)
Maximum Chuck To Base Distance	41.22" (1047mm)
Speed Range	250-3000
Table Insert	3.7" x 3.9" (94mm x 99mm)
Table Dims	11.61" x 12.59" (295mm x 320mm)
Chuck Style	Keyed/ MT2-JT3
Shank Capacity	5/8" (16mm)
Led Light	Yes
Laser (Cross Hair)	Yes
Readout	Digital
Speed Selection	Dial
Column Diameter	Φ 73mm
Base Size	18.25" x 11.74" x 2.28" (463.7mm x 298.2mm x 58mm)
Overall Dimensions Assembled, LxWxH (Approx.)	24.46" x 20.51" x 70.17" (H) (621.37mm x 521mm x 1782.47mm (H))



PM1-34



PM2820EVS DRILL PRESS

- Gear-driven power transfers torque consistently and efficiently for any project
- The PM2820EVS is built for multi-material use, including wood, steel, aluminum and other materials.
- Spindle speed ranges from 150-870 Low to 600-3600 High
- The most versatile table of any drill press.
- Allows large center table to be removed for better access for oversized pieces and accessories.
- The large cast table adjusts to a range of positions and tilts to a full ninety degree position.
- A high visibility laser pinpoints the drilling location for total accuracy

STOCK NO.	DESCRIPTION
PM9-1792820	PM9-1792820 Short Bed Lathe, 2HP 1/3PH 220V

ACCESSORIES

STOCK NO.	DESCRIPTION
1792821	PM2820EVS Tool Shelf
1792822	PM2820EVS Magnetic Tool Holder
1792824	PM2820EVS Table with MicroJig Acc
1792825	PM2820EVS Down Draft



1792820



1792821
PM2820EVS
TOOL SHELF



1792824
PM2820EVS
MICROJIG
CLAMPS AND
TABLE



1792822
PM2820EVS
MAGNETIC
TOOL HOLDER



1792825
PM2820EVS
DOWNDRAFT
TABLE

PM2800B 18" VARIABLE SPEED DRILL PRESS

- Mechanical variable speed allows for full range of speed with no belt changes
- 6" of quill travel with one revolution of the handle
- Fence system adjustable for a perfect 90° relationship to the table, for rapid alignment of stock

STOCK NO.	DESCRIPTION
1792800B	PM2800B Drill Press, 1HP 1PH 115/230V



1792800B

PM701 BENCHTOP DELUXE MORTISER 719T TILT TABLE MORTISER WITH STAND

- Gear-driven power transfers torque consistently and efficiently for any project
- The PM2820EVS is built for multi-material use, including wood, steel, aluminum and other materials.
- Spindle speed ranges from 150-870 Low to 600-3600 High
- The most versatile table of any drill press
- Allows large center table to be removed for better access for oversized pieces and accessories.
- The large cast table adjusts to a range of positions and tilts to a full ninety degree position.
- A high-visibility laser pinpoints the drilling location for total accuracy

STOCK NO.	DESCRIPTION
1791310	PM701, Benchtop Mortiser, 3/4HP 1PH 115/230V
1791264K	719T, Tilt Table Mortiser with stand, 1HP 1PH 115/230V

ACCESSORIES

STOCK NO.	DESCRIPTION
1791091	Premium Mortise Chisel & Bit 1/4"
1791092	Premium Mortise Chisel & Bit 5/16"
1791093	Premium Mortise Chisel & Bit 3/8"
1791094	Premium Mortise Chisel & Bit 1/2"
1791095	Premium Mortise Chisel & Bit 3/4"
1791096	Premium Mortise Chisel & Bits, Set of 4



1791310



1791264K

PM2200 CYCLONE DUST COLLECTOR

- Proprietary auto-cleaning HEPA filter technology for better filtration and longer filter life
- One-handed drum release allows for simple removal of drum for bag changes
- Vacuum pressure gauge provides greater user feedback while machine is running
- HEPA filter collects 99.97% of all particles passing through as small as .3 micron
- Multiple hose mounting options: three 4" dust ports or one 8" dust port
- Vacuum lines retain the bag without the need for a separate bag frame

STOCK NO.	DESCRIPTION
1792200HK	Powermatic® Cyclone 3HP with HEPA Filter
1792200H	PM2200 with HEPA Filter



1792200HK



TURBOCONE DUST COLLECTORS

- TurboCone™ improves chip separation and collector bag packing efficiency
- Steel impeller is designed for peak performance
- Remote-controlled digital timer can be programmed for up to 99 minutes
- The cone eliminates premature filter clogging for sustained performance
- All-metal duct construction for rigidity and improved air flow

STOCK NO.	DESCRIPTION
1791078K	PM1300TX-BK Dust Collector, 1.75HP 1PH 115/230V, 30-Micron Bag Filter Kit
1791079K	PM1300TX-CK Dust Collector, 1.75HP 1PH 115/230V, 2-Micron Canister Kit
1792071K	PM1900TX-BK1 Dust Collector, 3HP 1PH 230V, 30-Micron Bag Filter Kit
1792072K	PM1900TX-CK1 Dust Collector, 3HP 1PH 230V, 2-Micron Canister Kit
1792073K	PM1900TX-BK3 Dust Collector, 3HP 3PH 230/460V, 30-Micron Bag Filter Kit
1792074K	PM1900TX-CK3 Dust Collector, 3HP 3PH 230/460V, 2-Micron Canister Kit



1791079K



1792071K



PM1250 MICRO DUST AFS

- Patented filter technology works like a magnet, attracting and capturing the most dangerous dust particles from the air down to 0.1 micron
- Electrostatic filter has a 3,000-hour life and easy-clean accessibility
- Cycles air 5x per hour and is proven to reduce airborne particles in a 680 sq. ft. area similar to an oversized 2-car garage or shop
- Quieter than normal conversation at 50.8 dBA on high and 41.3 dBA on low speed settings
- Easy portability with a convenient carrying handle, and includes multiple mounting positions for maximum versatility in the shop
- Radio frequency remote for quick and easy control anywhere

STOCK NO.	DESCRIPTION
1791331	Powermatic® PM 1250 Micro-Dust AFS
1791332	Powermatic® PM 1250 Micro-Dust Filter



1791331




PM1200 AIR FILTRATION SYSTEM

- Two-filter system traps particles as small as 1 micron
- Diffusion filter dispenses exhausted air
- Remote control operates on radio frequency for wider range of effectiveness
- Indicator lights up after 200 hours to remind users to replace filters
- Three blower speeds to modify air flow
- Filter guards install and remove easily without tools for quick access to filters
- Inner filter has fine mesh pockets for high efficiency, can be blown clean

STOCK NO.	DESCRIPTION
1791330	PM1200 Air Filtration System, 1/4HP 1PH 115V

ACCESSORIES

STOCK NO.	DESCRIPTION
1791082	Inner Filter, PM1200
1791083	Outer Filter, 12" x 24" x 1", for PM1200

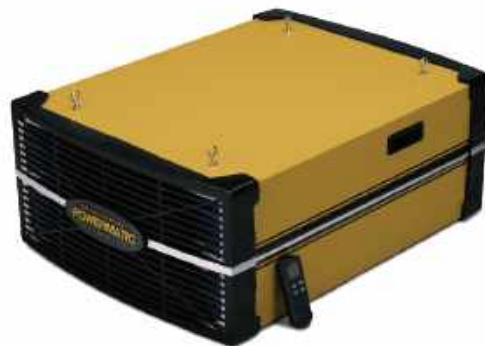

1791330

DS20 20" DISC SANDERS

- The Powermatic® DS20 20" Disc Sander is ideal for the professional or serious home woodworking shop
- Direct drive from motor to disc for maximum efficiency
- Hand activated brake for quick stoppage of disc
- Extra-large sanding surface
- Adjustable tilting work table

STOCK NO.	DESCRIPTION
1791264	DS-20, 20" Disc Sander, 3HP 3PH 230/460V
1791276	DS-20, 20" Disc Sander, 2HP 1PH 230V



1791276

31A BELT/DISC SANDERS

- Versatile 6" belt and 12" disc sanding allows for multiple sanding angles
- Belt table tilts down to 45° and can be set for beveled and mitered angle sanding; multi-position belt head locks at any angle from 0° to 90° and includes indexing pin for 0°, 45° and 90° stops

STOCK NO.	DESCRIPTION
1791291K	31A Sander, 6" x 48" Belt/12" Disc, 1.5HP 1PH 115/230V, Manual Switch
1791292K	31A Sander, 6" x 48" Belt/12" Disc, 2HP 3PH 230/460V, Manual Switch



1791291K

NEW OES9138B OSCILLATING EDGE SANDERS

- Large-radius end table has 6" vertical travel and 45° tilt for any angle and working height needed

STOCK NO.	DESCRIPTION
PM1-263	NEW OES9138B Oscillating Edge Sander, 3HP, 1PH, 230V
PM1-264	NEW OES9138B-3 Oscillating Edge Sander, 3HP, 3PH, 230V



PM1-263

NEW OSS10 OSCILLATING SPINDLE SANDER

- Sturdy 'Stay Flat' Table: Ensure precision on the 24.5 x 24.5" cast iron surface, designed for consistent performance.
- Efficient Oscillation: Enjoy cleaner spindles with up to 60 oscillations per minute and a 1.5" oscillation distance.
- Variable Spindle Speed: Adjust speeds from 600 to 1800 RPM to suit different materials and applications for optimal results.
- Efficient Dust Collection: Keep your workspace clean with a strategically placed dust collection point for enhanced efficiency.

STOCK NO.	DESCRIPTION
PM1-266	NEW OSS10 Oscillating Spindle Sander, 1HP 1PH 115V



PM1-266

PM2244 DRUM SANDER

- Integrated LED control panel shows power, belt speed, and DRO
- Included infeed/outfeed tables provide 37-1/2" of support for the workpiece
- The feed logic system monitors the load on the drum motor and regulates the speed of the conveyor motor to maintain the highest feed rate without overload

STOCK NO.	DESCRIPTION
1792244	PM2244 Drum Sander, 1-3/4HP, 115V



1792244

PJ882 8" PARALLELOGRAM JOINTERS

- Large 8" x 82" precision-ground cast-iron table surface for heavy-duty work

ARMORGLIDE TECHNOLOGY	
STOCK NO.	MODEL
PM1-1610079T	PJ882T, 8" Parallelogram Jointer, 2HP 1PH 230V SH, ArmorGlide
PM1-1610082T	PJ-882HHT, 8" Parallelogram Jointer, 2HP 1PH 230V HH, ArmorGlide

STOCK NO.	MODEL
1610079	PJ-882, 8" Parallelogram Jointer, 2HP 1PH 230V
1610082	PJ-882HH, 8" Parallelogram Jointer, 2HP 1PH 230V, Helical Cutterhead

ACCESSORIES	
STOCK NO.	DESCRIPTION
1791212	SHELIX-I: (10) Inserts for SHELIX Cutterhead
6296046	Knives (Set of 3) for Models 60A, 60B, PJ882

1285 12" JOINTERS

- Rack-and-pinion adjustable cast-iron fence assembly for smooth fence positioning without play

ARMORGLIDE TECHNOLOGY	
STOCK NO.	MODEL
PM1-1791241T	1285T, 12" Parallelogram Jointer, 3HP 1PH 230V SH, ArmorGlide
PM1-1791307T	1285T, 12" Parallelogram Jointer, 3HP 1PH 230V HH, ArmorGlide
PM1-1791308T	1285T, 12" Parallelogram Jointer, 3HP 3PH 230V HH, ArmorGlide

STOCK NO.	MODEL
1791307	1285, 12" Jointer, 3HP 1PH 230V, Helical Head
1791308	1285, 12" Jointer, 3HP 3PH 230/460V, Helical Head
1791241	1285, 12" Jointer, 3HP 1PH 230V

ACCESSORIES	
STOCK NO.	DESCRIPTION
6292535	Knives (Set of 3) for Model 1285 Straight Knife
6400013	Inserts (Set of 10) for Model 1285 and PJ1696 Helical Heads
PJ1696-011	Rabbit Inserts (Set of 2) for Model 1285 and PJ1696 Helical Heads



PM1-1610082T



PM1-1791307T

1696 16" JOINTERS

- Rack-and-pinion adjustable cast-iron fence assembly for smooth fence positioning without play

ARMORGLIDE TECHNOLOGY

STOCK NO.	MODEL
PM1-1791283T	PJ1696T, 16" Parallelogram Jointer, 7.5HP 3PH 230V HH, ArmorGlide

STOCK NO.	MODEL
1791283	PJ1696 JNTR 7.5HP 3PH 230V



PM1-1791283T

CONTACT CUSTOMER SERVICE WITH QUESTIONS ABOUT 460V PRODUCTS

60C & 60HH 8" JOINTERS

- Extra-long tables are mounted on dovetailed ways for extended workpiece support

STOCK NO.	DESCRIPTION
1610086K	60HH, 8" Jointer, 2HP 1PH 230V, Magnetic Switch, Helical Cutterhead
1610084K	60C, 8" Jointer, 2HP 1PH 230V, Magnetic Switch

ACCESSORIES

STOCK NO.	DESCRIPTION
1791212	SHELIX-I: (10) Inserts for SHELIX Cutterhead
6296046	Knives (Set of 3) for Models 60A, 60B, PJ882



1610084K

54A & 54HH 6" DELUXE JOINTERS

- 66" long adjustable infeed and outfeed beds mounted on dovetailed ways

STOCK NO.	DESCRIPTION
1791317K	54HH 6" Jointer, 1HP 1PH 115/230V, Helical Cutterhead
1791279DXK	54A, 6" Jointer, 1HP 1PH 115/230V, Quick-Set Knives

ACCESSORIES

STOCK NO.	DESCRIPTION
1791212	SHELIX-I: (10) Inserts for SHELIX Cutterhead
708801	Knives, Quick Set for 6" Jointer (Set of 3)



1791279DXK

209 & 209HH 20" PLANERS

- Chip breaker and pressure bar assists to reduce snipe
- Available with 100 four-sided carbide inserts for the helical cutterhead or a 4-blade high-speed steel straight knife cutterhead
- Fully enclosed base cabinet with integrated casters for shop mobility
- Chrome-plated, ergonomic handwheel makes adjustments smooth and easy
- Cast-iron table with extensions creates a big 55-1/2" x 20" working area

STOCK NO.	DESCRIPTION
1791315	209HH-1, 20" Planer, 5HP 1PH 230V, SHELIX Head
1791316	209HH-3, 20" Planer, 5HP 3PH 230/460V, SHELIX Head
1791296	209, 20" Planer, 5HP 1PH 230V
1791297	209, 20" Planer, 5HP 3PH 230/460V

ACCESSORIES

STOCK NO.	DESCRIPTION
1791212	SHELIX-I: (10) Inserts for SHELIX Cutterhead
6292621	Knives, Single Sided (set of 4) for Models 208, 209

15HH 15" PLANER

- Helical cutterhead with 74 four-sided carbide inserts provides a smoother cut and a finer finish than conventional knives
- Three v-belts transfer maximum power to the cutterheads
- Lockable built-in caster system allows for mobility in the shop
- Serrated steel infeed roller and smooth steel outfeed roller allows for 3/16" maximum depth of cut and a full width maximum depth of cut of 1/8" and trouble-free operation
- Two-speed gearbox features automatic chain tensioner
- Steel top-mounted return rollers speed repetitive cuts

STOCK NO.	DESCRIPTION
1791213	15HH, 15" Planer, 3HP 1PH 230V, no DRO

ACCESSORIES

STOCK NO.	DESCRIPTION
1791212	SHELIX-I: (10) Inserts for SHELIX Cutterhead

PM2700 SHAPERS

- Digital readout gives the user the exact spindle height and allows for .001" adjustments
- Micro-adjust control knobs for precision adjustment for fence
- Integrated casters can be raised and lowered to mobilize the shaper
- Heavy-duty cast-iron base
- Integrated caster system built into shaper base
- Two-speed reversible spindle speeds
- Independently adjustable fence sides
- Includes 3/4" and 1-1/4" spindles

STOCK NO.	DESCRIPTION
1280100C	PM2700 Shaper, 3HP 1PH 230V, DRO, Casters
1280101C	PM2700 Shaper, 5HP 1PH 230V, DRO, Casters
1280102C	PM2700 Shaper, 5HP 3PH 230/460V, DRO, Casters

ACCESSORIES

STOCK NO.	DESCRIPTION
1791205	1" Spindle for PM2700 Shaper
1791207	1/4" Router Collet for PM2700 Shaper
1791208	1/2" Router Collet for PM2700 Shaper



1791315



1791213



1280100CV

PM3000B 14" TABLE SAW

- One-piece, cast-iron box trunnion provides the strongest stability of any Powermatic® table saw
- Industrial-duty Accu-Fence System® ensures accurate cuts and increased safety
- Industrial magnetic switch has an easy-to-access, large ON/OFF switch with a built-in power indicator light and a removable magnetic safety key
- Poly-V drive belt system delivers efficient, quiet operation

ARMORGLIDE TECHNOLOGY

STOCK NO.	MODEL
PM1-PM375350KT	PM3000T, 14" Table Saw, 7.5HP 3PH 230/460V, 50" Accu-Fence System, ArmorGlide

STOCK NO.	MODEL
PM375350K	PM3000, 14" Tablesaw, 7.5HP 3PH 230/460V, 50" Accu-Fence

PM2000B 10" TABLE SAW

- One-piece, cast-iron box trunnion provides the strongest stability of any Powermatic® table saw
- Integrated digital readout for precise bevel cuts
- Integrated hydraulic caster system for ease of movement around the shop
- Arbor lock for quick and easy blade changes
- Precision-ground, high-luster cast-iron tabletops with front and rear edge bevel

ARMORGLIDE TECHNOLOGY

STOCK NO.	MODEL
PM1-PM23130KT	PM2000T, 10" Table Saw, 3HP 1PH 230V 30" Accu-Fence System, ArmorGlide
PM1-PM23150KT	PM2000T, 10" Table Saw, 3HP 1PH 230V 50" Accu-Fence System, ArmorGlide
PM1-PM23150WKT	PM2000T, 10" Table Saw, 3HP 1PH 230V 50" Accu-Fence System, Workbench, ArmorGlide
PM1-PM23150RKT	PM2000T, 10" Table Saw, 3HP 1PH 230V 50" Accu-Fence System, Router Lift, ArmorGlide
PM1-PM25130KT	PM2000T, 10" Table Saw, 5HP 1PH 230V 30" Accu-Fence System, ArmorGlide
PM1-PM25150KT	PM2000T, 10" Table Saw, 5HP 1PH 230V, 50" Accu-Fence System, ArmorGlide
PM1-PM25150WKT	PM2000T, 10" Table Saw, 5HP 1PH 230V 50" Accu-Fence System, Workbench, ArmorGlide
PM1-PM25150RKT	PM2000T, 10" Table Saw, 5HP 1PH 230V 50" Accu-Fence System, Router Lift, ArmorGlide
PM1-PM25330KT	PM2000T, 10" Table Saw, 5HP 3PH 230/460V 30" Accu-Fence System, ArmorGlide
PM1-PM25350KT	PM2000T, 10" Table Saw, 5HP 3PH 230/460V 50" Accu-Fence System, ArmorGlide
PM1-PM25350WKT	PM2000T, 10" Table Saw, 5H 3PH 230/460V 50" Accu-Fence System, Workbench, ArmorGlide
PM1-PM25350RKT	PM2000T, 10" Table Saw, 5H 3PH 230/460V 50" Accu-Fence System, Router Lift, ArmorGlide

STOCK NO.	MODEL
PM23130K	PM2000, 10" Tablesaw, 3HP 1PH 230V, 30" Accu-Fence System
PM23150K	PM2000, 10" Tablesaw, 3HP 1PH 230V, 50" Accu-Fence System
PM23150WK	PM2000, 10" Tablesaw, 3HP 1PH 230V, 50" Accu-Fence System, Workbench
PM23150RK	PM2000, 10" Tablesaw, 3HP 1PH 230V, 50" Accu-Fence System, Router Lift
PM25130K	PM2000, 10" Tablesaw, 5HP 1PH 230V, 30" Accu-Fence System
PM25150K	PM2000, 10" Tablesaw, 5HP 1PH 230V, 50" Accu-Fence System
PM25150WK	PM2000, 10" Tablesaw, 5HP 1PH 230V, 50" Accu-Fence System, Workbench
PM25150RK	PM2000, 10" Tablesaw, 5HP 1PH 230V, 50" Accu-Fence System, Router Lift
PM25330K	PM2000, 10" Tablesaw, 5HP 3PH 230/460V, 30" Accu-Fence System
PM25350K	PM2000, 10" Tablesaw, 5HP 3PH 230/460V, 50" Accu-Fence System
PM25350WK	PM2000, 10" Tablesaw, 5HP 3PH 230/460V, 50" Accu-Fence System, Workbench
PM25350RK	PM2000, 10" Tablesaw, 5HP 3PH 230/460V, 50" Accu-Fence System, Router Lift



PM1-PM375350KT

ACCESSORIES

STOCK NO.	DESCRIPTION
1791081B	Dado Insert for PM3000B, PM3000B



PM1-PM23130KT

CONTACT CUSTOMER SERVICE WITH QUESTIONS ABOUT 460V PRODUCTS

ACCESSORIES

STOCK NO.	DESCRIPTION
1791786B	Insert Zero-Clearance PM2000B
1791788B	Insert Dado for PM2000B
1791791B	Riving Knife Thin Kerf 0.079 for PM2000B
6827045Z	PM2000B 30.5x39 Accessory Workbench
1794860K	PMST-48 Powermatic® Sliding Table Kit

PM1000 TABLE SAWS

- Conveniently located hands-free power switch
- Precision-ground cast-iron work surface features a beveled edge for smoother operation
- Toolless guard assembly with independent side leaves is easy-to-use, maximizing safety
- Exclusive Accu-Fence® provides rigidity and precision
- The sturdy miter gauge pivots 60° to either side, allowing easy adjustment for a full range of cuts

ARMORGLIDE TECHNOLOGY

STOCK NO.	MODEL
PM1-1791000KT	PM1000T, 10" Table Saw, 1-3/4HP 1PH 115V, 30" Accu-Fence with Riving Knife, ArmorGlide
PM1-1791001KT	PM1000T, 10" Table Saw, 1-3/4H 1PH 115V, 52" Accu-Fence with Riving Knife, ArmorGlide

STOCK NO.	MODEL
1791000K	PM1000 Tablesaw, 1-3/4HP 1PH 115V, 30" Accu-Fence System with Riving Knife
1791001K	PM1000 Tablesaw, 1-3/4HP 1PH 115V, 52" Accu-Fence System with Riving Knife

ACCESSORIES

STOCK NO.	DESCRIPTION
1791793	PM1000-TKLPRK, .79" Thin Kerf, Low Profile Riving Knife

64B TABLE SAWS

- Blade guard and riving knife have quick release for toolless mounting and removal
- Accu-Fence® locks to rail without play for increased safety and precision
- Riving knife maintains close blade proximity to reduce chance of kickback
- Cast-iron trunnion ensures smooth blade positioning
- Micro-adjust miter gauge with extension fence offers wider cross-cut support

STOCK NO.	DESCRIPTION
1791229K	64B, 1.75 HP 115/230V, 30" Fence with Riving Knife
1791230K	64B, 1.75 HP 115/230V, 50" Fence with Riving Knife

ACCESSORIES

STOCK NO.	DESCRIPTION
1791088	Dado Insert, 64B



PM1-1791001KT



1791229K


POWER FEEDERS

- Continuous-duty motors transfer power from the gear box to the feed roller
- Solid cast-iron construction of body pieces and base
- Moveable universal joints and locking mechanisms lock the feeder in horizontal, vertical, or angle feed positions
- Universal joints provide stability for vibration-free feeding
- Roller chain and sprocket design provide positive feeding for all types of materials

ACCESSORIES

STOCK NO. DESCRIPTION

1790800K	PF-33 Power Feeder, 1HP 3PH 230V, 4-Speed, 3 Wheel
1790807K	PF-31 Power Feeder, 1HP 1PH 115V, 4-Speed, 3 Wheel
1790810K	PF-33 Power Feeder, 1HP 3PH 460V, 4-Speed, 3 Wheel
1790811K	PF-43 Power Feeder, 1HP 3PH 230V, 4-Speed, 4 Wheel
1790812K	PF-41 Power Feeder, 1HP 1PH 115V, 4-Speed, 4 Wheel
1790818	PF3-JR Power Feeder, 1/4HP 1PH 115V, 4-Speed, 3 Wheel

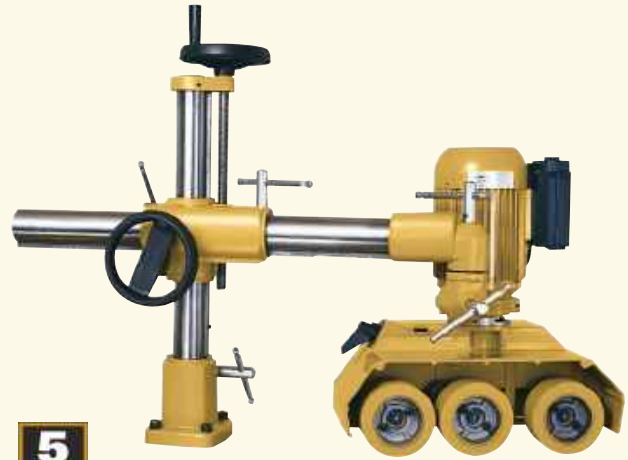

1790800K

MOBILE BASES

- Spring-pin snap adjustment requires no tools for easy assembly
- Adjustable width and length let you configure the base to the tool for total support and portability
- Two fixed and two swivel casters provide easy maneuverability
- Available in heavy-duty or industrial-duty styles to meet your needs

ACCESSORIES

STOCK NO. DESCRIPTION

2042377	Mobile Base for PWBS-14
2042374	Mobile Base for 54A,54HH Jointers
2042376	Mobile Base for 60C,60HH Jointers
1610078	Mobile Base for PJ882,PJ882HH Jointers



2042377



1610078



FOR MORE INFORMATION CONTACT YOUR LOCAL DISTRIBUTORS

FOR MOST CURRENT FREIGHT, PAYMENT, AND WARRANTY TERMS, VISIT JPWINDUSTRIES.COM/FREIGHT-AND-PAYMENT-TERMS
OFFER AVAILABLE AT PARTICIPATING DEALERS ONLY WHILE SUPPLIES LAST.

JPW INDUSTRIES RESERVES THE RIGHT TO CORRECT ANY PRICING, PRODUCT SPECIFICATIONS OR IMAGE
DISCREPANCIES. ©2025 JPW INDUSTRIES ALL RIGHTS RESERVED. PRINTED IN THE U.S.A

LAVERGNE, TN 37086 | STOCK NO. 23-15494 | JAN 2025